

# Polycom® HDX 9001

## Technical Specifications



### Video Standards & Protocols

- H.261
- H.263++
- H.264
- People+Content / H.239
- H.263 & H.264 Video Error Concealment

### People Video Resolution

- 4SIF (704 x 480)/4CIF (704 x 576) at 256Kbps-4Mbps (480p)
- SIF (352 x 240), CIF (352 x 288)
- QSIF (176 x 120), QCIF (176 x 144)
- Choice of native 4:3 or 16:9 display aspect ratios

### Content Video Resolution

- Input: SXGA (1280x1024), XGA (1024 x 768), SVGA (800 x 600), VGA (640 x 480)
- Output: XGA (1024x768), SVGA (800x600)

### Audio Standards & Protocols

- Polycom StereoSurround™
- 22kHz bandwidth with Polycom Siren 22
- 14kHz bandwidth with Polycom Siren 14, G.722.1 Annex C
- 7 kHz bandwidth with G.722, G.722.1
- 3.4 kHz bandwidth with G.711, G.728, G.729A
- Automatic Gain Control
- Automatic Noise Suppression
- Instant Adaptation Echo Cancellation
- Audio Error Concealment

### Other ITU-Supported Standards

- H.221 communications
- H.224/H.281 far-end camera control
- H.323 Annex Q far-end camera control
- H.225, H.245, H.241, H.331
- H.239 Dual Stream
- H.231 in multipoint calls
- H.243 chair control
- H.460 NAT/firewall traversal
- BONDING, Mode 1

### Network

- Interfaces
  - 10/100/1000 auto NIC, RJ45 connector
  - RJ11 analog phone connector
- H.323 up to 4Mbps (point to point)
- SIP up to 4Mbps (point to point)
- H.320
  - ISDN Quad BRI
  - ISDN PRI T1 or E1
  - Serial (RS449, V.35, RS 530) up to 2Mbps
- iPriority for QoS
- Reconfigurable MTU size
- Auto SPID detection and line number configuration

### User Interface

- COD (PathNavigator Conference on Demand)
- Directory Services
- System Management
  - Web based
  - SNMP
  - GMS
- CDR
- API support
- International languages (16)

### Security

- Secure web
- Secure Telnet
- Security mode
- Embedded AES FIPS 197, H.235V3 and H.233/234
- Secure password authentication

### Options

- Polycom EagleEye HD Camera
  - 1280 x 720p CCD imager
  - 12X optical zoom
  - 72deg FOV at min zoom
  - + 100 deg pan range
  - +20/-30 deg tilt range
  - Output formats: SMPTE 296M 1280 x 720, 50/60 FPS
  - Component, YPbPr output

- People On Content™
- MPPlus software for up to 4 sites
  - Mixed IP and ISDN conferences
  - Audio transcoding
  - StereoSurround and Siren 22 audio
  - Dual monitor emulation
  - People+Content supported
  - Voice activated switching
  - Continuous presence
- HDX Microphone Array
- Upgrade to HD functionality (720p)
- Upgrade to 4Mbps line rate

### Electrical

- Auto sensing power supply
- Typical operating voltage/power 97VA @ 115V @ 60 Hz @ .97 PF
- Typical operating voltage/power 110VA @ 230V @ 60 Hz @ .87 PF
- Typical operating voltage/power 107VA @ 230V @ 50 Hz @ .88 PF

*These numbers were empirically collected under TYPICAL operating conditions. No attempt was made to force max power consumption. Voltages and currents are RMS. Power units are Volt-Amp.*

### Environmental Specification


- Operating Temperature: 0-40°C
- Operating Humidity: 10-80%
- Non-Operating Temperature: -40° -70° C
- Non-Operating Humidity (Non-condensing): 10-90%
- Maximum altitude is 10,000 feet

### Physical Characteristics

- Video Base Unit (W/H/D): 17.2"x3.44"x14.5"; 436.88 mm / 87.38 mm / 368.3 mm
- Video Base Unit Weight: 19.5 lbs; 8.9 kg

### Warranty

- One-year return to factory parts and labor
- 90-day software warranty

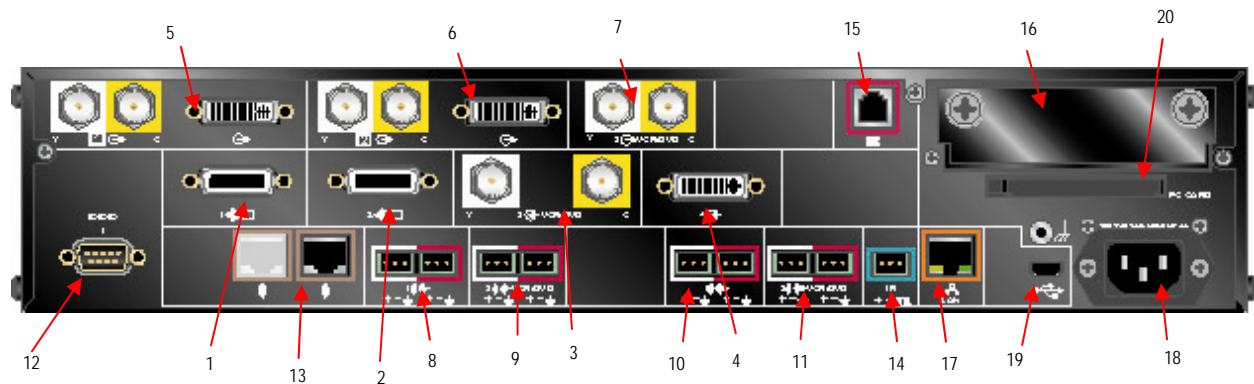

- |   |   |  |
|---|---|--|
| 1. Video input 1: HDCI (Composite, S-Video, YPbPr)                    | 8. Audio input 1: Phoenix, stereo (main audio)                          | 14. IR receiver                          |
| 2. Video input 2: HDCI (Composite, S-Video, YPbPr)                    | 9. Audio input 3: Phoenix, stereo (VCR audio, assoc with video input 3) | 15. POTS phone connection                |
| 3. Video input 3: 2-BNC (Composite, S-Video)                          | 10. Audio output 1: Phoenix, stereo (main audio)                        | 16. H.320 network interface bay          |
| 4. Video input 4: DVI-I (VGA, DVI)                                    | 11. Audio output 3: Phoenix, stereo (VCR audio)                         | 17. LAN/NIC, 10/100/1000 auto sensing    |
| 5. Video output 1: 2-BNC (S-Video, Composite) DVI-I (VGA, DVI, YPbPr) | 12. RS-232 port for control   | 18. EIA electrical input                 |
| 6. Video output 2: 2-BNC (S-Video, Composite) DVI-I (VGA, DVI, YPbPr) | 13. Connector for HDX Microphone Arrays (up to 4 daisy-chained)         | 19. USB port (inactive first release)    |
| 7. Video output 3: 2-BNC (S-video, Composite)                         |   | 20. PCMCIA slot (inactive first release) |